



Features

- Built-in Web Server
- Web HMI
- Support for both Modbus TCP and Modbus UDP Protocols
- Communication Security
- Dual Watchdog
- Wide Operating Temperature Range: -25 ~ +75°C
- I/O Pair Connection
- Built-in I/O
 - Strain Gauge Input: 2 Channels
 - AO: 1 Channels
 - DI/Counter: 2 Channels
 - DO: 2 Channels



Introduction

The ET-7016/PET-7016 is a web-based Ethernet I/O module that features a built-in web server which allows remote configuration, I/O monitoring and I/O control simply by using a regular web browser. Remote control is as easy as surfing the Internet. In addition, the web HMI function means that programming or HTML skills are no longer required so creating dynamic and attractive web pages for I/O monitoring and I/O control purposes will be more fun for engineers in the future. The ET-7016/PET-7016 offers easy and safe access for users at anytime and from anywhere, and also supports the Modbus TCP protocol that ensures perfect integration with SCADA software. Furthermore, the PET-7016 features "PoE", meaning that not only is data transmitted through an Ethernet cable but also power making installation of the PET-7016 a piece of cake. Imagine no more unnecessary wires with only an Ethernet cable being required to take care of everything in the field.

The ET-7016/PET-7016 is a strain gauge module providing are 2 analog input channels, 1 excitation voltage output channel, 2 digital input channels and 2 digital output channels module. It provides a programmable input range on all analog inputs (+/-1 mV, +/-50 mV, +/-100 mV, +/-500 mV, +/-1 V, and +/-2.5 V) and supports full-bridge, half-bridge, and quarter-bridge. The range for each analog input is allowed to be configured individually. Excitation voltage output can be in the range of 0 ~ 10 V with a 60 mA driving efficiency. Digital outputs can also be set as alarm outputs. The ET-7016/PET-7016 can also provide long-distance strain gauge measurement that compensates for the loss of voltage resulting from long-distance measurements.

Applications

Building Automation, Factory Automation, Machine Automation, Remote Maintenance, Remote Diagnosis, Testing Equipment.

System Specifications

Models	ET-7016		PET-7016
Software			
Built-in Web Server	Yes		
Web HMI	Yes		
I/O Pair Connection	Yes		
Communication			
Ethernet Port	10/100 Base-TX with Auto MDI/MDI-X		
PoE	-	Yes	
Protocol	Modbus TCP, Modbus UDP		
Security	ID, Password and IP Filter		
Dual Watchdog	Yes, Module (0.8 seconds), Communication (Programmable)		
LED Indicators			
L1 (System Running)	Yes		
L2 (Ethernet Link/Act)	Yes		
L3 (Ethernet 10/100 M Speed)	Yes		
PoE Power	-	Yes	
2-Way Isolation			
Ethernet	1500 Vdc	-	
I/O	2500 Vdc	2500 Vdc	
EMS Protection			
ESD (IEC 61000-4-2)	4 kV Contact for Each Terminal and 8 kV Air for Random Point		
EFT (IEC 61000-4-4)	+/-4 kV for Power		
Power Requirements			
Reverse Polarity Protection	Yes		
Powered from Terminal Block	Yes, 10 ~ 30 Vdc	Yes, 12 ~ 48 Vdc	
Powered from PoE	-	Yes, IEEE 802.3af, Class1	
Consumption	4.2 W	5.3 W	
Mechanical			
Dimensions (W x L x H)	72 mm x 123 mm x 35 mm		
Installation	DIN-Rail or Wall Mounting		
Environment			
Operating Temperature	-25 ~ +75°C		
Storage Temperature	-30 ~ +80°C		
Humidity	10 ~ 90% RH, Non-condensing		

I/O Specifications

Strain Gauge Input	
Channels	2 (Differential)
Type	+/-15 mV, +/-50 mV, +/-100 mV, +/-500 mV, +/-1 V, +/-2.5 V, +/-20mA, 10 ~ 20 mA, 4 ~ 20 mA
Strain Gauge Type	Full-Bridge, Half-Bridge, and Quarter-Bridge
Individual Channel Configuration	Yes
Resolution	16-bit
Sampling Rate	10 Samples/Second (Total)
Accuracy	+/-0.05%
Zero Drift	+/-0.5 $\mu\text{V}/^{\circ}\text{C}$
Span Drift	+/-25 ppm/ $^{\circ}\text{C}$
Overvoltage Protection	30 V _{DC}
Input Impedance	Voltage Input: >400 k Ω , Current Input: 125 Ω
Common Mode Rejection	150 dB min.
Normal Mode Rejection	100 dB
Excitation Voltage Output	
Channels	1
Output Range	0 ~ 10 V
Max. Output Load Current	60 mA
Accuracy	+/-0.05% of FSR
Drift	+/- 50 ppm/ $^{\circ}\text{C}$
Power-on Value	Yes
Digital Input/Counter	
Channels	2
Contact	Wet
Sink/Source (NPN/PNP)	Sink/Source
Off Voltage Level	+1 V _{DC} Max.
On Voltage Level	+3.5 V _{DC} ~ +50 V _{DC}
Counters	Channels
	Max. Count
	Max. Input Frequency
	Min. Pulse Width
Overvoltage Protection	70 V _{DC}
Digital Output	
Channels	2
Type	Isolated Open Collector
Sink/Source (NPN/PNP)	Sink
Max. Load Current	700 mA/Channel
Load Voltage	+ 5 V _{DC} ~ + 50 V _{DC}
Overvoltage Protection	60 V _{DC}
Overload Protection	1.4 A
Short-circuit Protection	Yes
Power-on Value	Yes, Programmable
Safe Value	Yes, Programmable

Excitation Voltage

Strain Gauge	Quarter-Bridge	Half-Bridge	Full-Bridge
120R	7.0V	7.0V	3.5V
350R	10V	10V	10V

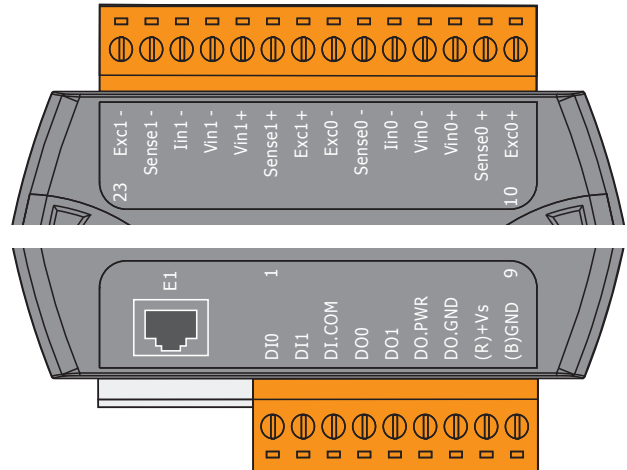
Ordering Information

Art. 126890 ET-7016 CR	2-channel Strain Gauge and DIO Module (RoHS)
Art. 126919 PET-7016 CR	2-channel Strain Gauge and DIO Module with PoE (RoHS)






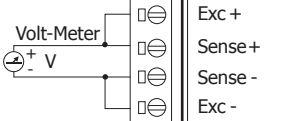
Accessories

	NS-205 CR	Unmanaged 5-port Industrial Ethernet Switch; requires a 24 V _{DC} Input (RoHS)
	NS-205PSE CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires a 48 V _{DC} Input (RoHS)
	NS-205PSE-24V CR	Unmanaged Ethernet switch with 4-PoE and 1 RJ45 uplink; requires a 24 V _{DC} Input (RoHS)
	MDR-20-24 CR	24V/1A, 24 W Power Supply with DIN-Rail Mounting (RoHS)
	DIN-KA52F-48 CR	48V/0.52A, 25 W Power Supply with DIN-Rail Mounting (RoHS)

Pin Assignments



Wire Connections

Bridge Sensor/Load Cell/Strain Gauge		
Full Bridge	Half Bridge	Quarter Bridge
		
Analog Input		
Voltage Input	Current Input	
		
Analog Output		
		

Digital Input/Counter	Readback as 1	Readback as 0
	+10 ~ +50 V _{DC}	OPEN or <4 V _{DC}
Sink		
Source		

Output Type	ON State	OFF State
	Readback as 1	Readback as 0
Drive Relay		
Resistance Load		