
# MEC-LAN-M101i

### Mini PCI-e 1-port 10/100/1000 isolated Ethernet board

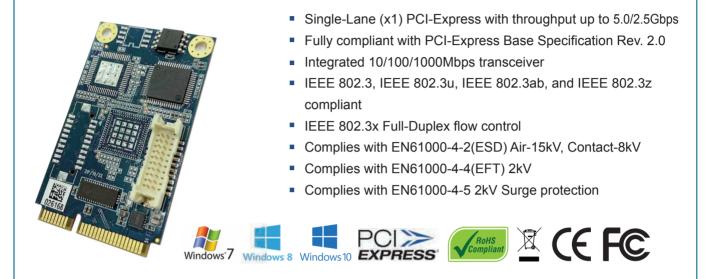

# Overview

MEC-LAN-M101i is a single isolated GbE LAN module for embedded PC. The card follows the Mini PCI-e standard which is compliant with PCI Express x 1 classification and small form factor (30×50.95 mm). This board fits in any host computer that has Mini PCI-e card slots. MEC-LAN-M101i is a highly cost-effective solution to expand Gigabyte network for your computer.

## **Top Performance**

MEC-LAN-M101i has one Ethernet port that supports auto-negotiation 10/100/1000Mbps Ethernet connection with IEEE 802.3x flow control.

## Intel Ethernet Chipset

MEC-LAN-M101i uses high performance, efficiency, and stability Intel I210-IT Gigabit Ethernet Controller.

## **High Usability**

MEC-LAN-M101i is designed with flexibilities for many different application and accessories (daughter board, bracket, connection cable) are included in the standard package.

## MECFIX – Versatile Mounting

MECFIX is the unique mounting mechanism designed specially for MEC daughterboard. The feature of the mounting unit allows the following mounting options:

- 1. Standard PCI/PCIe Bracket
- 2. Low Profile PCI/PCIe Bracket
- 3. **Internal Mounting** inside of PC system from any position and angle.

4. **Customizing Front/Rear Plate** of PC system according to dimension of MEC daughterboard.

Spectra GmbH & Co. KG vertrieb@spectra.de

Niederlassung Österreich info@spectra-austria.at



Spectra (Schweiz) AG info@spectra.ch

spectra

# Specifications

#### General

PCI-Express Revision: PCI-Express Base Specification Rev. 2.0 PCI-Express Electromechanical Revision: PCI-Express Mini Card Electromechanical Rev. 2.0

#### Hardware

**Controllers:** Intel I210-IT x 1 **Bus:** Single-Lane (x1) PCI-Express with throughput up to 5.0/2.5Gbps

#### Interface (Connector) Ethernet 10/100/1000: 1 (RJ45)

#### Technology Standards:

IEEE 802.3 for 10BaseT
IEEE 802.3u for 100BaseT(X)
IEEE 802.3ab for 1000BaseT(X)
IEEE 802.3z for 1000BaseX

Flow Control: IEEE 802.3x flow control

#### **Driver Support**

Operating Systems: Win 7, Win 8, Win 10

### Dimensions

Power Requirement Power Consumption: 195mA@3.3V

Dimensions Width x Length (mm): 30.00 x 50.95

### Environmental Limits


Operating Temperature:  $-40^{\circ}C \sim 85^{\circ}C$ Storage Temperature:  $-40^{\circ}C \sim 125^{\circ}C$ Humidity (non-condensing):  $5\% \sim 95\%$ 


#### **Regulatory Approvals**

EMC: CE, FCC EMI: EN 55032, EN61000-3-2, EN61000-3-3, FCC Part 15 Subpart B Class B EMS: EN 55035, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11


#### Reliability


Warranty: 3 years

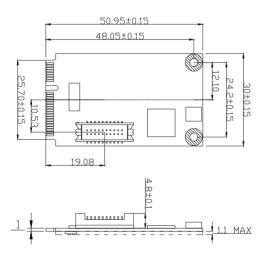



. 98.00





Right

## Package Checklist

- Mini PCI-e Card x 1
- Daughter Board x1
- Bracket x 1
- M2.5 Screw x 2
- 20Pin Internal Cable (30cm) x 1
- Quick Installation Guide (Printed) x 1

# **Ordering Information**

## Available Models

MEC-LAN-M101i ÁOEdÁ »ÁFÎ Í Ì FÎ

Mini PCI-e 1-port 10/100/1000 isolated Ethernet board

Spectra GmbH & Co. KG vertrieb@spectra.de

Niederlassung Österreich info@spectra-austria.at

Spectra (Schweiz) AG info@spectra.ch

spectra